
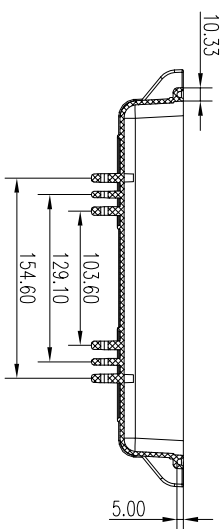
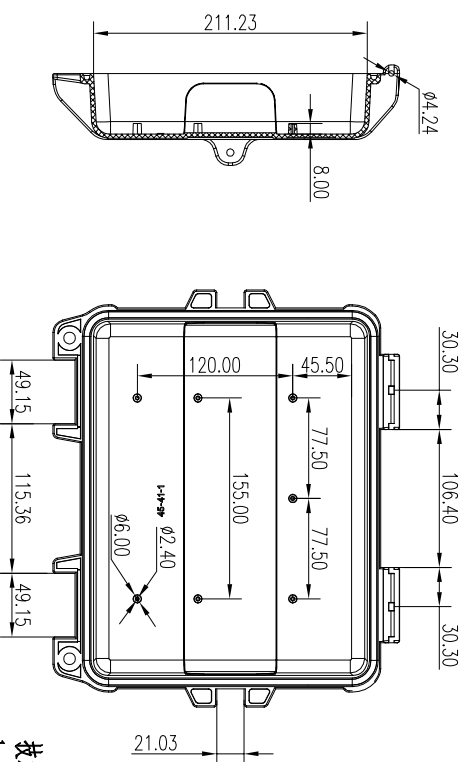
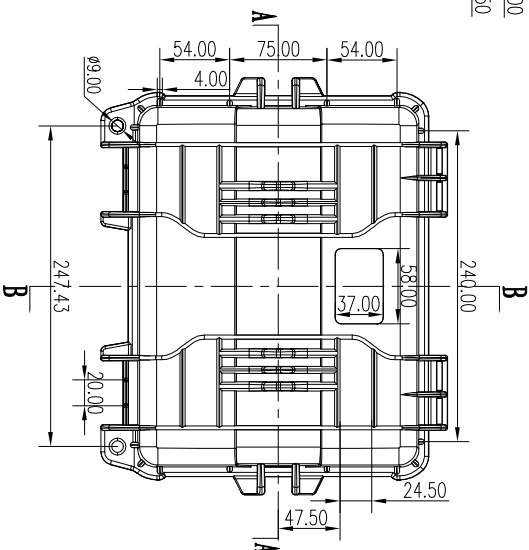
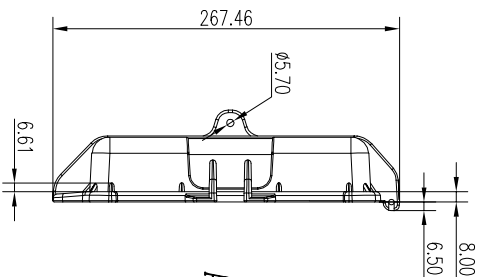
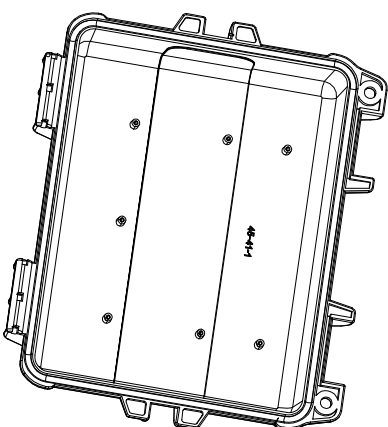
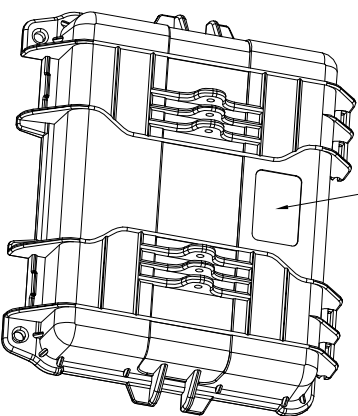


1	GB/T 1804 尺寸分段					3
公差等级	>0.5~3	3~6	6~30	>30~120	>120~400	>400~1000
f (精密级)	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3
m (中等级)	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8
c (粗糙级)	±0.2	±0.3	±0.5	±0.8	±1.2	±2
尺寸分段	0~5	5~20	20~50	50~100	100~200	200~4000
公差值	±0.1	±0.15	±0.2	±0.25	±0.3	±4
角度	±0.5°					

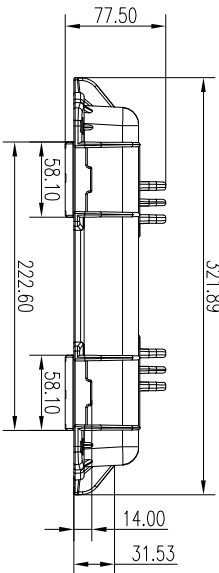

- 技术要求:
1. 材料按客户要求定;
 2. 注塑产品无缺料, 无拉白, 无毛边;
 3. 表面处理为4号皮纹, 和45-40一样;
 4. 未注尺寸见3D;
 5. 未注公差按GB/T1804-m级;

制图		审核		批准		客户名称		材料	
Drawing		Auditing		Confirm		Custom Name		Material	
						产品名称		图纸比例	
						产品编号		范围	
						Product Code		Project View	
						45-41-1		A3	
						SANHE		中国·宁波慈溪	
						NINGBO SANHE ENCLOSURE CORPORATION		TEL: +86(574)63256910	
								FAX: +86(574)63256900	